




**MASTERLINE METRIC DOUBLE SNAP RING SHAFT ASSEMBLY**

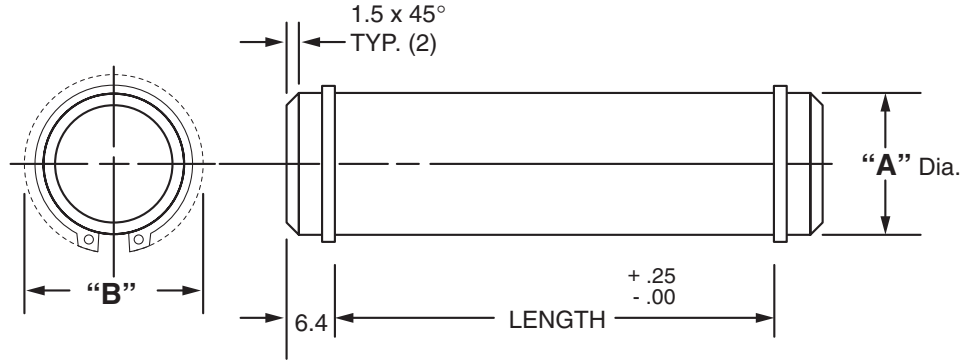

For Tolerance on "A" Dia., see Section I, page 7

"A" Dia.	"B" Dia.	"A" Dia.	"B" Dia.
6M	9.1	20M	28.4
8M	13.7	25M	35.6
9M	14.7	27M	37.8
10M	15.7	30M	41.1
12M	17.5	35M	46.0
14M	20.6	38M	50.8
17M	23.9	45M	59.4
19M	27.7	50M	64.8

Available in four (4) series:

"DRS" – 12L14 CRS

"DRM" – T.G. & P. Alloy, HDN R<sub>C</sub> 28-32

"DRH" – 12L14 CRS, CARB., HDN. & GR., R<sub>C</sub> 56-60 (.75mm min. case)

"DRY" – 304 Stainless Steel

Each assembly includes one (1) shaft and two (2) snap rings.

NOTE: Snap rings under 7mm diameter are made of copper/beryllium.

Stainless steel snap rings provided with "DRY" series.

Shafts and snap rings may be ordered separately.

Other diameters are available on request. (see "How To Order")


Shafts are available with lube holes, lube grooves and extractor option.

(refer to Sec. II, page 44 and Sec. V, page 1 & 4)

**Masterline Metric Double Snap Ring Shaft Assembly**

To specify metric (millimeters) when ordering, use a capital "M" behind each dimension.

**How To Order:**

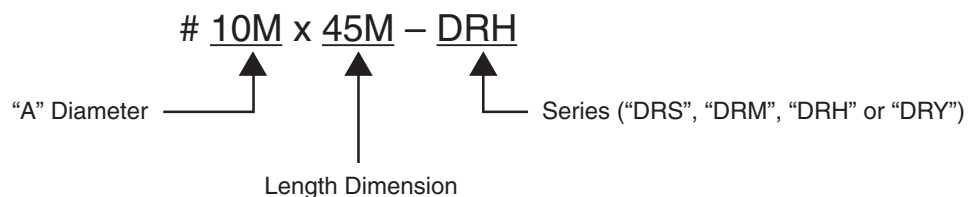

All Parts Available In Inch And Metric.