




*Masterline® Design & Mfg., Inc.*

DESIGN SERVICES & PRODUCTS

41580 Production Dr. • Harrison Twp., Michigan 48045 • (586) 463-5888 • Fax (586) 463-8817

## MASTERLINE DOUBLE SNAP RING SHAFT ASSEMBLY

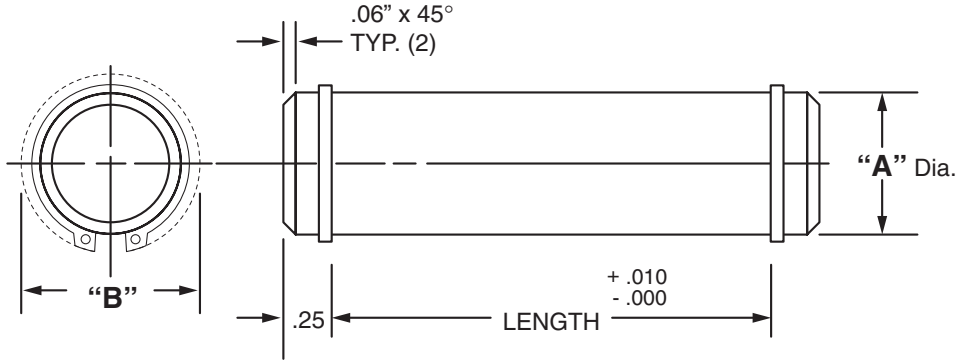

For Tolerance on "A" Dia., see Section I, page 7

"A" Dia.	"B" Dia.	Cad File No.	"A" Dia.	"B" Dia.	Cad File No.
.250	.43	DRZ250	1.125	1.49	DRZ1125
.375	.59	DRZ375	1.250	1.62	DRZ1250
.500	.74	DRZ500	1.500	1.90	DRZ1500
.625	.87	DRZ625	1.750	2.21	DRZ1750
.750	1.05	DRZ750	2.000	2.44	DRZ2000
.875	1.16	DRZ875	2.250	2.74	DRZ2250
1.000	1.35	DRZ1000	2.500	2.98	DRZ2500

Available in four (4) series:

"DRS" – 12L14 CRS

"DRM" – T.G. & P. Alloy, HDN  $R_c$  28-32

"DRH" – 12L14 CRS, CARB., HDN. & GR.,  $R_c$  56-60 (.03 min. case)

"DRY" – 304 Stainless Steel

Each assembly includes one (1) shaft and two (2) snap rings.

NOTE: Snap rings under 1/4" diameter are made of copper/beryllium.

Stainless steel snap rings provided with "DRY" series.

Shafts and snap rings may be ordered separately.


Other diameters are available on request. (see "How To Order")

Shafts are available with lube holes, lube grooves and extractor option.

(refer to Sec. II, page 43 and Sec. V, page 1 & 4)

### Masterline Double Snap Ring Shaft Assembly

#### How To Order:

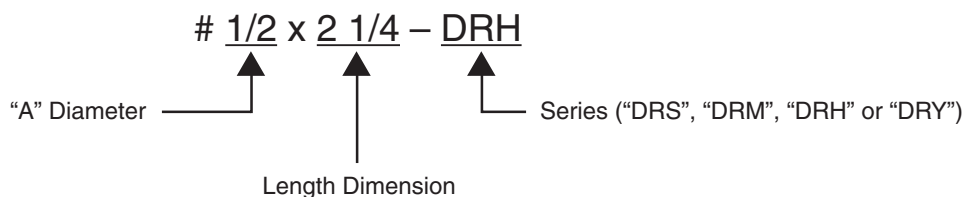

All Parts Available In Inch And Metric.